

FAMILY: **JLWPEE2 RW**

NOTES:

TYPE: **WET LOCATION LED EMERGENCY EXIT S IGN**


FEATURE

- Injection-molded thermoplastic ABS housing and polycarbonate cover, UL 94V-0 flame rating.
- Innovative, easy installation in minutes
- Letters 6" height with 3/4" stroke. RED letters.
- Universal J-box mounting pattern
- 120V/277VAC Dual voltage operation
- Single or double face(Universal).
- Built-in 3.6V500mAh Ni-Mh battery for minimum 90 minutes emergency operation. (JLWPEEW)
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- UL and cULus Wet location listed
- -20° to 40°C outdoor wet location listed
- Five years warranty for the electrical parts and housing.
- Three years warranty for battery



ORDERING INFORMATION

FAMILY	TYPE	FACEPLATE	LENS	HOUSING COLOR
JLWPE	EE(SIGN ONLY)	1(SALIDA)	R(RED)	W(WHITE)
	EC(WITH TWO LAMP HEADS)	2(DOUBLE)	G(GREEN)	B(BLACK)

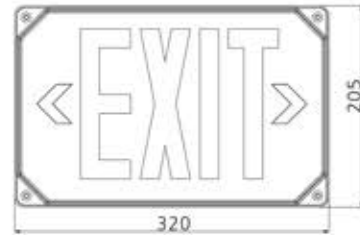

PACKING INFORMATION

MODEL NO.	PACKING INFORMATION	WEIGHTS
JLWPEE2RW	44x34x24cm/6pcs	9/8kgs
JLWPEE2GW	44x34x24cm/6pcs	9/8kgs

ELECTRICAL INFORMATION

MODEL	RATED VOLTAGE	INPUT CURRENT	INPUT WATT	LED TYPE	CHARGING TIME	EMERGENCY RUN TIME
JLWPEE2RW	120/277V	0.025/0.016A	2.9W	10pcs ultra bright RED LED	24 Hrs	90 Mins
JLWPEE2GW	120/277V	0.026/0.014A	2.9W	6pcs ultra bright GREEN LED	24 Hrs	90 Mins